

Ho-Pac®

Ho-Pac® Offers a faster, less expensive way to drive than mechanically powered drivers that rely solely on impact energy.



Ho-Pac® COMPACTOR SPECIFICATIONS

MODEL		500	1000	1600	2300
Impulse Force	lbs. (n)	3,940 (17,530)	8,000 (35,586)	16,000 (71,170)	24,000 (106,760)
Cycles per minute		2,000	2,000	2,100	2,100
Hydraulic Flow Required	gpm (lpm)	9/14/18+ (34)(53)(68)	12/18/21+ (45)(68)(79)	34 (129)	47 (178)
Maximum Hydraulic Pressure	psi (bar)	2,000/2,500/2,800+ (138)(172)(193)	2,000/2,000/2,800+ (138)(138)(193)	2,300 (158)	2,200 (152)
Base Plate Dimension	in. (cm)	12 x 27 (31 x 69)	24 x 32 (61 x 81)	29 x 32 (74 x 81)	34 x 38 (86 x 97)
Recommended Carrier Weight	tons	2.5 - 5	5 - 10	10 - 20	20 +
Cradle Type		FLAT TOP	FLAT TOP	FLAT TOP	FLAT TOP
Weight	lbs. (kg)	491 (223)	1034 (469)	1565 (710)	2216 (1005)

*Select the configuration which best matches maximum carrier flow. **Varies with motor.



(BREAKER HIRE AND SALES) LTD

NELSTROP ROAD, OFF LONGFORD ROAD WEST,
LEVENSHULME, MANCHESTER. M19 3JL

TEL: 0161 225 9740 •

info@mtk-breakers.co.uk • www.mtk-breakers.co.uk

**WHEN Ho-Pac® GOES TO WORK
WE GET THE JOB DONE IN NO TIME FLAT**

THE INDUSTRY'S No 1
HYDRAULIC COMPACTOR
AND DRIVER

WE OFFER A RANGE OF FOUR **Ho-Pac** MODELS TO FIT MOST EXCAVATORS FROM MINI'S TO UNITS OF OVER 20 TONS.

MODEL 500



Specially designed for mini-excavators, small skid-steer loaders, rubber tyred backhoes and trenchers with bucket.

Allied's continous product improvement has now made a highly successful product-the Ho-Pac[®]-even better with the Model 500, Model 1000, Model 1600 and Model 2300. The all new extreme Ho-Pacs now deliver **more** impact energy, **multiple** bolt on base plates, an **errorless** four-function valve, a **variety** of mounting configurations and **maintenance-free** oil splash bearing lubrication.

The advantages of the all-new generation of extreme Ho-Pacs include:

- Larger eccentric with mass further away from shaft centreline helps to increase impulse and compaction force.
- Oil splash provides maintenance-free (**no greasing**) bearing lubrication.
- Base plate can be unbolted easily to allow replacement with a different size (**wider or narrower**) or custom attachment.
- New hose routing for better protection against sheared or damaged hoses.
- Worry-free "**plug-and-go**" installation.
- Tough-coat hoses prevent cuts and extend wear-life.
- Four-function valve controls flow, pressure, regeneration and oil flow direction.
- Flat top mounting

MODEL 1600




The 1600 fits virtually all larger backhoe/loaders and small excavators.

MODEL 1000



This model fits to all small/medium rubber-tyred backhoe/loaders.

MODEL 2300

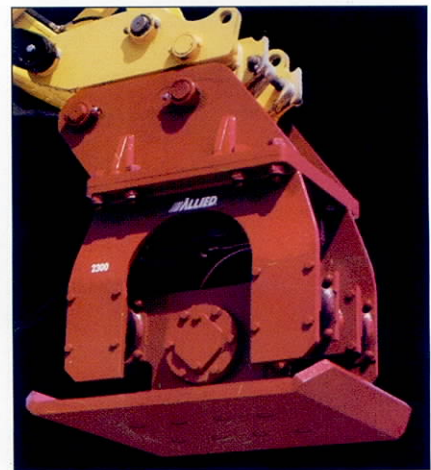

Our largest compactor/driver offers unprecedented performance designed for larger excavators (20 tons and over).