


IC SERIES – SCRAP SHEARS



		IC1.8	IC 2	IC3.5	IC 5	IC 7	IC10	IC 15
Weight	kg	220	450	360	650	750	1.250	1.650
Excavator weight								
Boom position	ton	0,8-2	1,5-3	1,5-3	3,5-7	3,5-7	8-13	8-15
Bucket position	ton	1,7-4	3,5-7	3-6	6-12	7-14	12-17	14-23
Dimensions								
A opening	mm	200	240	270	280	340	450	460
B depth	mm	185	283	240	250	310	380	400
C length	mm	1.280	1.300	1.570	1.650	1.750	2.360	2.400
Working pressure	bar	200 250	280	200 250	300	300	300	320
Oil flow	l/m	20 80	50 100	50 100	50 100	50 100	50 100	150 200
Rotation pressure	bar	130	150 250	130	150 250	150 250	150 250	110
Rotation flow	l/m	5 8	8 10	5 8	8 10	8 10	8 10	30
Cutting capacity								
●	mm	30	30	35	40	45	55	60
H (HEA)	mm	-	-	-	100	120	160	170
I (IPE)	mm	120	120	140	180	200	220	240

Weights include standard adapter - Cutting capacities values (indicatives) apply to a steel grade St 37 - All dimensions and weights are indicatives and subject to change without notice.

IC SERIES – SCRAP SHEARS

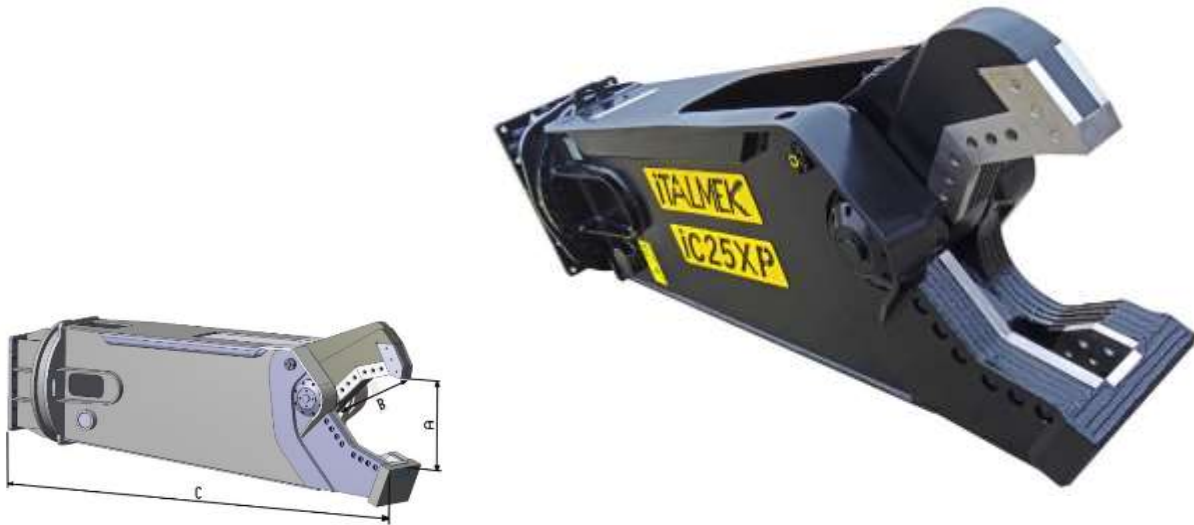

		IC 18	IC 23	IC25XP	IC38	IC 46	IC 54	IC 71	IC 95
Weight	kg	1950	2.300	2.950	3.750	4.450	5.450	7.150	9.450
Excavator weight									
Boom position	ton	9-18	12-20	16-25	22-32	26-36	29-45	42-60	55-80
Bucket position	ton	16-26	20-28	23-35	32-47	42-52	46-65	60-95	80-110
Dimensions									
A opening	mm	480	550	590	700	750	790	860	990
B depth	mm	430	500	530	630	710	760	870	965
C length	mm	2.490	2.720	2.800	3.200	3.540	3.700	4.100	4.600
Working pressure	bar	320	340	340	350	350	350	350	350
Oil flow	l/m	150 230	150 250	200 300	230 350	230 350	270 400	350 500	450 600
Rotation pressure	bar	110	110	110	110	110	110	180	180
Rotation flow	l/m	30	30	30	30	30	30	50	70
Cutting capacity									
●	mm	65	70	80	90	100	110	120	140
H (HEA)	mm	180	220	270	320	340	360	450	600
I (IPE)	mm	270	330	450	550	600	600	650	800

Weights include standard adapter up to IC25XP - Cutting capacities values (indicatives) apply to a steel grade St 37 - All dimensions and weights are indicatives and subject to change without notice.